

Agilia/Agilia IO

Smart gentle heat radiator with possibility of remote piloting

 ErP Ready



COMFORT

- Homogeneous & gentle heat diffusion
- Double heating element: heating front film + aluminium heating element
- Integrated programming adjusting to the user's life rhythm
- Compatible with Cozytouch: remote piloting through a smartphone or a tablet**

SAVINGS

- Up to 45% of energy savings* thanks to integrated programming and presence detector**
- 6-command pilot wire: Comfort, Comfort - 1°C, Comfort - 2°C, Eco, Frost-free, Off
- Electronic thermostat
- Energy consumption indicator for careful, responsible use of the appliance
- Automatically detects opening/closing of windows, to switch to frost-free mode if a window is open
- ErP-ready

USER-FRIENDLINESS

- User-friendly digital screen showing the temperature and energy consumption
- ASP (Anti-Staining Process) to reduce staining on wall and equipment
- Easy installation thanks to H-shaped vertical support
- Ergonomic LCD digital controls
- 2 modes: Manual/Prog (Agilia)
- 3 modes: Manual/Prog/Auto (Agilia IO)

DESIGN

- Compact & elegant design
- 2 available models: horizontal and vertical
- Front panel colour: textured matt white (RAL 9016)



 A B C Model available***	GENTLE HEAT RADIATOR 500 TO 2000 W Output	UP TO +45% ENERGY SAVINGS* Energy saving
 LCD digital controls	  IO-Homecontrol™ Cozytouch Smart Pilot Technology	ALUMINIUM HEATING ELEMENT Heating element type

*Compared with a mechanical convector

**Available only for Agilia IO

*** Model types: A: Horizontal / B: Vertical / C: Plinth




- 1 Fast heating surface
- 2 Sheated heating element with aluminium diffusor
- 3 Movement and light sensors **
- 4 LCD digital controls



- 1 Temperature and active mode display
- 2 modes: Manual/Prog (Agilia)
- 3 modes: Manual/Prog/Auto (Agilia IO)
- 2 Navigation buttons
- 3 Access to menu/validation
- 4 Energy consumption indicator

INSTALLATION DIMENSIONS (in mm)

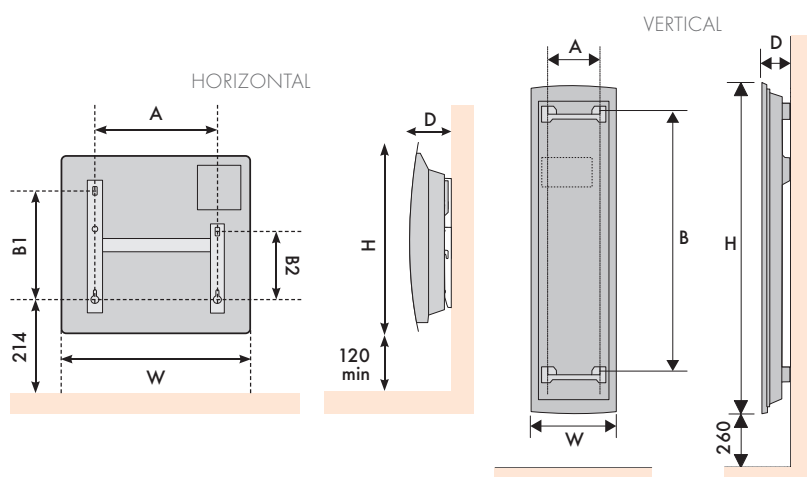

Smart Pilot

A simple move
and the radiator takes
care of everything

=

UP TO
+45%
ENERGY
SAVINGS*

AGILIA/AGILIA IO

TECHNICAL DATA

TECHNICAL DATA	DIMENSIONS (MM)							NET WEIGHT (KG)
OUTPUT (W)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B	B1	B2	
Agilia/Agilia IO Horizontal								
500	372	530	129	120.8	-	246	158.5	5.5
750	372	530	129	120.8	-	246	158.5	5.5
1000	446	530	129	194.8	-	246	158.5	6
1250	520	530	129	268.8	-	246	158.5	7.5
1500	594	530	138	342.8	-	246	158.5	9
2000	742	530	138	490.8	-	246	158.5	9
Agilia/Agilia IO Vertical								
1500	460	1392	145	280	1082	-	-	18
2000	460	1540	145	280	1230	-	-	19.5

*Compared with a mechanical convector

**Available only for Agilia IO

CE - Classe II - IP 24

www.atlantic-comfort.com